

LAMPIRAN

E50S Series

Diameter ø50mm Shaft type Incremental Rotary Encoder

Line-up

■ Features

- 12-24VDC power supply of line driver output(Line-up)
- Suitable for measuring angle, position, revolution, speed, acceleration and distance
- Power supply : 5VDC, 12-24VDC ±5%

■ Applications

- Various tooling machinery, packing machine and general industrial machinery etc.

Please read "Caution for your safety" in operation manual before using.



■ Ordering information (Former name : ENB)

E50S	8	8000	3	N	24	
------	---	------	---	---	----	--

Series	Shaft diameter	Pulse/1 Revolution	Output phase	Output	Power supply	Cable
Diameter ø50mm, shaft type	ø8mm	Refer to resolution	2: A, B 3: A, B, Z 4: A, A, B, B 6: A, A, B, B, Z, Z	T: Totem pole output N: NPN open collector output V: Voltage output L: Line driver output	5 : 5VDC ±5% 24: 12-24VDC ±5%	No mark: Cable type C: Connector/cable type(×) CR: Axial connector type CS: Radial connector type

× Standard : E50S8 (8000) 3-N-24

× Cable length: 250mm

■ Specifications

Item		Diameter ø50mm shaft type of incremental rotary encoder	
Resolution(P/R) ¹⁾		*1: *2, *5, 10, 12, 15, 20, 23, 25, 30, 35, 40, 45, 50, 60, 75, 100, 120, 125, 150, 192, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 5000, 8000, 8000	
Output phase		A, B, Z phase(Line driver : A, A, B, B, Z, Z phase)	
Phase difference of output		Phase difference between A and B : $\frac{1}{4} \pm \frac{1}{8}$ (T=1 cycle of A phase)	
Electrical specification	Control output	Totem pole output	• Low - Load current: Max. 30mA, Residual voltage : Max. 0.4VDC • High - Load current: Max. 10mA, Output voltage(Power voltage 5VDC) : Min. (Power voltage-2.0)VDC, Output voltage(Power voltage 12-24VDC) : Min. (Power voltage-3.0)VDC
	NPN open collector output	Voltage output	Load current : Max. 30mA, Residual voltage : Max. 0.4VDC
		Line driver output	• Low - Load current : Max. 20mA, Residual : Max. 0.5VDC • High - Load current : Max. -20mA, Output voltage(Power voltage 5VDC) : Min. 2.5VDC, Output voltage(Power voltage 12-24VDC) : Min. (Power voltage-3.0)VDC
		Totem pole output	
	Response time (Rise/Fall)	NPN open collector output	Max. 1μs
Mechanical specification	Max. Response frequency		300kHz
	Power supply		• 5VDC ±5%(Ripple P-P : Max. 5%) • 12-24VDC ±5%(Ripple P-P : Max. 5%)
	Current consumption		Max. 80mA(disconnection of the load), Line driver output : Max. 50mA(disconnection of the load)
	Insulation resistance		Min. 100MΩ(at 500VDC megger between all terminals and case)
	Dielectric strength		750VAC 50/60Hz for 1 minute(Between all terminals and case)
	Connection		Cable type, 250mm connector cable type, Connector type(Axial, Radial)
	Starting torque		Max. 70gf·cm(0.007N·m) ²⁾ / Max. 800gf·cm(0.08N·m) ³⁾
	Moment of inertia		Max. 80g·cm ² (8×10 ⁻⁵ kg·m ²) ²⁾ / Max. 400g·cm ² (4×10 ⁻⁵ kg·m ²) ³⁾
	Shaft loading		Radial : 10kgf, Thrust : 2.5kgf
	Max. allowable revolution ⁴⁾		5000rpm
Vibration		1.5mm amplitude or 300m/s ² at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours	
Shock		Approx. Max. 75G	
Environment	Ambient temperature	-10 to 70°C, storage : -25 to 85°C	
	Ambient humidity	35 to 85%RH, storage : 35 to 90%RH	
Protection		Cable type, Connector cable type: IP50(IEC standard) ⁵⁾ , Connector type: IP65(IEC standard)	
Cable		ø5, 5-wire, Length : 2m, Shield cable(Line driver output : ø5, 8-wire) (AWG 24, Core diameter : 0.08mm, Number of cores : 40, Insulator out diameter : ø1)	
Accessory		ø8mm coupling, bracket	
Approval		Cable type CE (Except for line driver output)	
Unit weight		Approx. 275g, Connector type : 180g	

TLP250

Transistor Inverter

Inverter For Air Conditioner

IGBT Gate Drive

Power MOS FET Gate Drive

The TOSHIBA TLP250 consists of a GaAlAs light emitting diode and a integrated photodetector.

This unit is 8-lead DIP package.

TLP250 is suitable for gate driving circuit of IGBT or power MOS FET.

- Input threshold current: $I_F=5\text{mA}(\text{max.})$
- Supply current (I_{CC}): $11\text{mA}(\text{max.})$
- Supply voltage (V_{CC}): $10\sim 35\text{V}$
- Output current (I_O): $\pm 1.5\text{A}(\text{max.})$
- Switching time (t_{pLH}/t_{pHL}): $0.5\mu\text{s}(\text{max.})$
- Isolation voltage: $2500V_{rms}(\text{min.})$
- UL recognized: UL1577, file No.E67349
- Option(D4)

VDE Approved : DIN EN60747-5-2

Maximum Operating Insulation Voltage : $890V_{PK}$


Highest Permissible Over Voltage : $4000V_{PK}$

(Note):When a EN60747-5-2 approved type is needed,
Please designate "Option(D4)"

Truth Table


		Tr1	Tr2
Input LED	On	On	Off
	Off	Off	On

Unit in mm

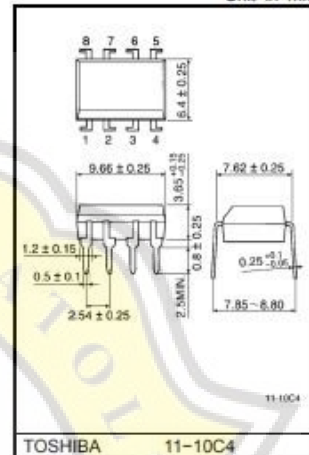


Weight: 0.54 g(Typ.)

Pin Configuration (top view)

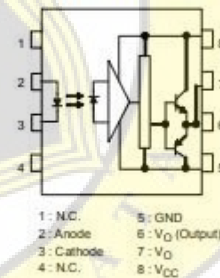

Schematic

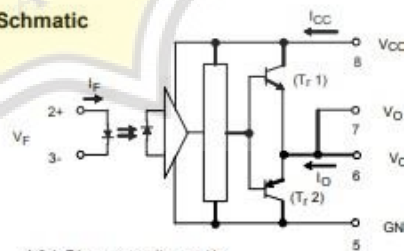

A 0.1 μF bypass capacitor must be connected between pin 8 and 5 (See Note 5).

This chapter describes the electrical and switching characteristics for Cyclone® IV devices. Electrical characteristics include operating conditions and power consumption. Switching characteristics include transceiver specifications, core, and periphery performance. This chapter also describes I/O timing, including programmable I/O element (IOE) delay and programmable output buffer delay.

This chapter includes the following sections:

- “Operating Conditions” on page 1-1
- “Power Consumption” on page 1-16
- “Switching Characteristics” on page 1-16
- “I/O Timing” on page 1-37
- “Glossary” on page 1-37

Operating Conditions

When Cyclone IV devices are implemented in a system, they are rated according to a set of defined parameters. To maintain the highest possible performance and reliability of Cyclone IV devices, you must consider the operating requirements described in this chapter.

Cyclone IV devices are offered in commercial, industrial, extended industrial and, automotive grades. Cyclone IV E devices offer -6 (fastest), -7, -8, -8L, and -9L speed grades for commercial devices, -8L speed grades for industrial devices, and -7 speed grade for extended industrial and automotive devices. Cyclone IV GX devices offer -6 (fastest), -7, and -8 speed grades for commercial devices and -7 speed grade for industrial devices.

For more information about the supported speed grades for respective Cyclone IV devices, refer to the *Cyclone IV FPGA Device Family Overview* chapter.

Cyclone IV E devices are offered in core voltages of 1.0 and 1.2 V. Cyclone IV E devices with a core voltage of 1.0 V have an ‘L’ prefix attached to the speed grade.

In this chapter, a prefix associated with the operating temperature range is attached to the speed grades; commercial with a “C” prefix, industrial with an “I” prefix, and automotive with an “A” prefix. Therefore, commercial devices are indicated as C6, C7, C8, C8L, or C9L per respective speed grade. Industrial devices are indicated as I7, I8, or I8L. Automotive devices are indicated as A7.

© 2016 Altera Corporation. All rights reserved. ALTERA, ARRIA, CYCLONE, HARDCOPY, MAX, MEGACORE, NIOS, QUARTUS and STRATIX words and logos are trademarks of Altera Corporation and registered in the U.S. Patent and Trademark Office and in other countries. All other words and logos identified as trademarks or service marks are the property of their respective holders as described at www.altera.com/common/legal.html. Altera warrants performance of its semiconductor products to current specifications in accordance with Altera's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Altera assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Altera. Altera customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.



Current Transducer HX 03..50-P/SP2

$$I_{PN} = 3 \dots 50 \text{ A}$$

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

Primary nominal current rms I_{PN} (A)	Primary current measuring range ¹⁾ I_{PM} (A)	Primary conductor diameter x turns (mm)	Type	RoHS since date code
3	± 9	0.6d x 20T	HX 03-P/SP2	46128
5	± 15	0.8d x 12T	HX 05-P/SP2	46019
10	± 30	1.1d x 6T	HX 10-P/SP2	45352
15	± 45	1.4d x 4T	HX 15-P/SP2	46133
20	± 60	1.6d x 3T	HX 20-P/SP2	planned
25	± 75	1.6d x 2T	HX 25-P/SP2	46233
50	± 150	1.2 x 6.3 x 1T	HX 50-P/SP2	46152

V_{OUT}	Output voltage (Analog) @ $\pm I_{PM}$, $R_L = 2 \text{ k}\Omega$, $T_A = 25^\circ\text{C}$	$V_{DE} \pm 0.625$	V
R_{OUT}	Output internal resistance	< 50	Ω
R_L	Load resistance	≥ 2	$\text{k}\Omega$
V_{CC}	Supply voltage ($\pm 5\%$)	+ 12 .. 15	V
I_{CC}	Current consumption	< 15	mA
V_{AC}	Rms voltage for AC isolation test, 50 Hz, 1 min	> 3	kV
V_{s}	Partial discharge extinction voltage rms @ 10 pC	≥ 1	kV
\hat{V}_{W}	Impulse withstand voltage, 1.2/50 μs	≥ 6	kV

Accuracy-Dynamic performance data

X	Accuracy @ I_{PM} , $T_A = 25^\circ\text{C}$ (excluding offset)	$\leq \pm 1$	% of I_{PN}
ϵ_L	Linearity error ($0 \dots \pm I_{PN}$)	$\leq \pm 1$	% of I_{PN}
V_{OE}	Electrical offset voltage @ $T_A = 25^\circ\text{C}$	+ 2.5V \pm 50 mV	
V_{OH}	Hysteresis offset voltage @ $I_P = 0$: after an excursion of $1 \times I_{PM}$	$\leq \pm 10$	mV
TCV_{OE}	Temperature coefficient of V_{OE}	$\leq \pm 1.5$	mV/K
TCV_{OUT}	Temperature coefficient of V_{OUT} (% of reading)	± 0.1	%/K
t_r	Response time to 90% of I_{PN} step	≤ 3	μs
BW	Frequency bandwidth (-3 dB) ²⁾	50	kHz

General data

T_A	Ambient operating temperature	-25 .. +85	$^\circ\text{C}$
T_S	Ambient storage temperature	-25 .. +85	$^\circ\text{C}$
m	Mass	8	g
dCp	Creepage distance	≥ 5.5	mm
	Isolation material group	I	
	Standards	EN50178: 1997	

Features

- Galvanic isolation between primary and secondary circuit
- Hall effect measuring principle
- Isolation voltage 3000V
- Low power consumption
- Extended measuring range ($3 \times I_{PM}$)
- Isolated plastic case recognized according to UL94-V0.

Special feature

- Single supply from +12V to +15V

Advantages

- Low insertion losses
- Easy to mount with automatic handling system
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.

Applications

- Switched Mode Power Supplies (SMPS)
- AC variable speed drives
- Uninterruptible Power Supplies (UPS)
- Electrical appliances
- Battery supplied applications
- DC motor drives

Application domain

- Industrial

Notes : ¹⁾ With $R_L = 2 \text{ k}\Omega$

²⁾ Small signal only to avoid excessive heating of the magnetic core

Similarity Report

PAPER NAME

17.F1.0020_Naufal Imam Mufid

AUTHOR

Naufal Imam Mufid

WORD COUNT

3439 Words

CHARACTER COUNT

21895 Characters

PAGE COUNT

37 Pages

FILE SIZE

3.5MB

SUBMISSION DATE

Jun 30, 2022 8:49 AM GMT+7

REPORT DATE

Jun 30, 2022 8:50 AM GMT+7

● 19% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 17% Internet database
- 0% Publications database
- Crossref database
- Crossref Posted Content database
- 5% Submitted Works database

● Excluded from Similarity Report

- Bibliographic material
- Quoted material
- Cited material
- Small Matches (Less than 10 words)
- Manually excluded text blocks