


LAMPIRAN

Lampiran A

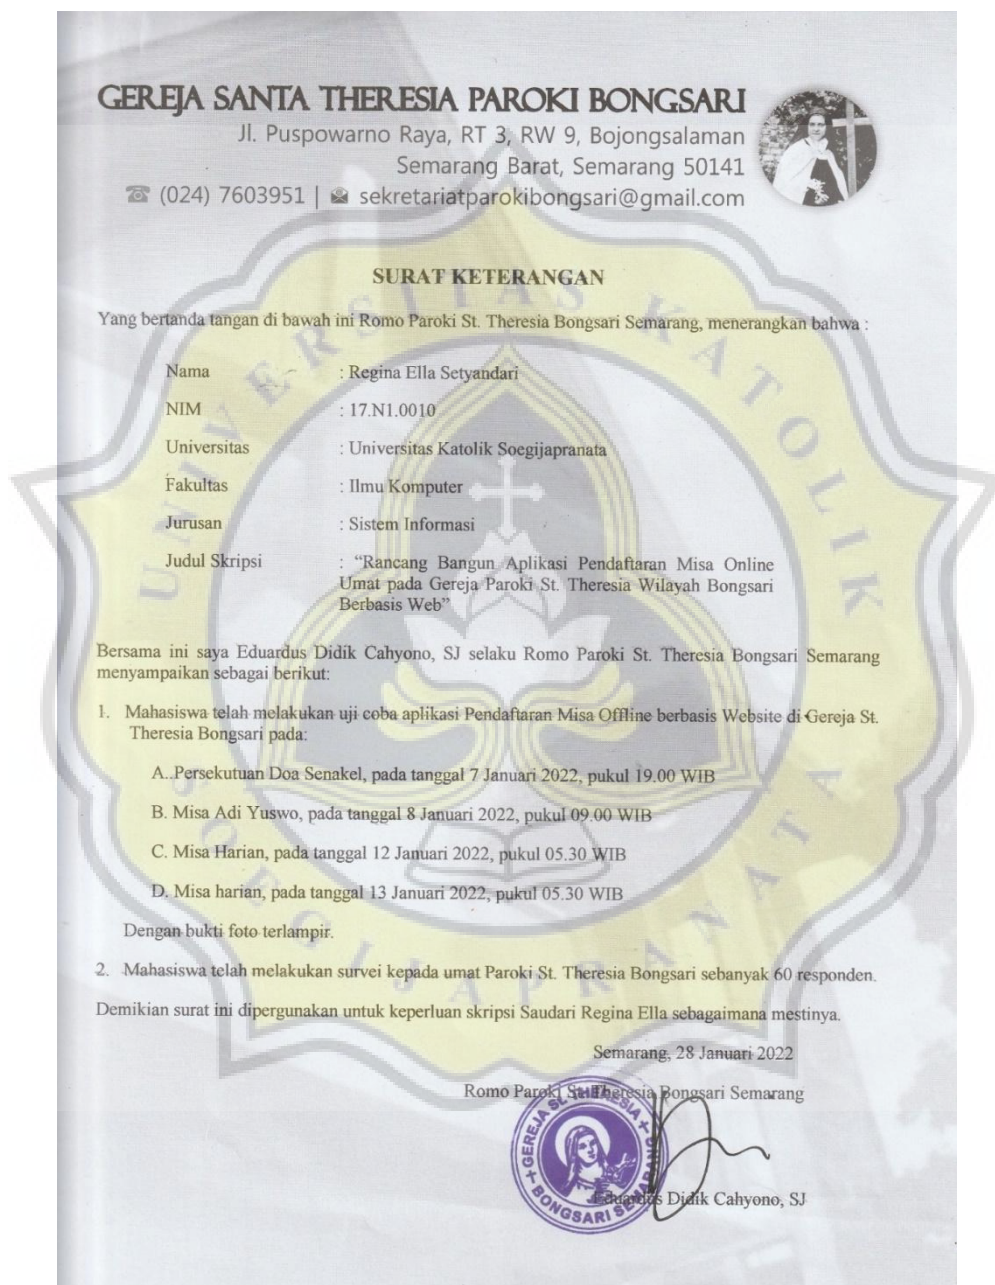

Gambar A.1 Surat Keterangan Uji Coba Aplikasi dari Gereja St. Theresia Paroki Bongsari

GEREJA SANTA THERESIA PAROKI BONGSARI

Jl. Puspowarno Raya, RT 3, RW 9, Bojongsalaman
Semarang Barat, Semarang 50141

☎ (024) 7603951 | ✉ sekretariatparokibongsari@gmail.com



Lampiran



Gambar A.2 Lampiran Surat Keterangan Uji Coba Aplikasi dari Gereja St. Theresia Paroki Bongsari

Lampiran B

```
$credentials = [  
    'username' => $this->username,  
    'password' => $this->password  
];  
if (Auth::attempt($credentials)) {  
    // if success login  
    if (!$user->roles()->first()) {  
        return redirect(route('dashboard'));  
    }  
  
    return redirect(route('client.home'));  
} else {  
    return $this->  
>emit('showAlertError', ['msg' => 'Username atau kata sandi salah']);  
}
```

Gambar B.1 Script Halaman Login

```

<div class="page-inner">
  <div class="row">
    <div class="col-md-12 text-center mb-4">
      <h1>Selamat datang</h1>
    </div>
    @if (auth()->user()-
>hasTeamPermission($curteam, 'pendaftaran:read'))
      <div class="col-lg-3 col-md-3 col-sm-6 col-12 mx-auto cursor-
pointer" wire:click="selectMenu('pendaftaran')">
        <div class="card card-stats card-primary card-round">
          <div class="card-body">
            <div class="numbers text-center">
              <h4 class="card-title mb-0">Pendaftaran Misa</h4>
            </div>
          </div>
        </div>
      </div>
    @endif

```

Gambar B.2 Script Halaman Menu untuk Umat



```

<x-select name="jadwal_id" change="true" label="Pilihan Jadwal">
  <option value="">Pilih Jadwal</option>
  @foreach ($jadwals as $jadwal)
    @if ($jadwal->pendaftarans->count() >= $jadwal-
>kuota_tersedia)
      <option value="" disabled>{{ $jadwal->tanggal-
>isoFormat('dddd, D MMMM Y')}} -
        {{ $jadwal->>waktu }}</option>
      @else
        <option value="{{ $jadwal->id }}">{{ $jadwal->tanggal-
>isoFormat('dddd, D MMMM Y')}} -
          {{ $jadwal->>waktu }}</option>
        @endif
      @endforeach
</x-select>
<x-select name="jumlah_anggota" label="Jumlah Pendaftar">
  <option value="">Pilih Jumlah</option>
  @if ($skuota > 10)
    @for ($sin = 0; $sin < 10; $sin++) <option value="{{ $sin+1 }}">{{
$sin+1 }} Orang</option>
    @endfor
  @else
    @for ($si = 0; $si < $skuota; $si++) <option value="{{ $si+1 }}">{
{$si+1 }} Orang</option>
    @endfor
  @endif

```

Gambar B.3 Script Halaman Menentukan Jadwal Misa dan Jumlah Pendaftar

```

<div class="card-body">
  @for ($i = 0; $i
  < $jumlah_anggota; $i++) <div class="card">
    <x-text-
  field type="text" name="username.{{$i}}" label="Username" />
    <x-
  select change="true" component="cekStatus" name="status_kesehatan.{{
  $i }}" label="Status Kesehatan">
    <option value="">Pilih Status Kesehatan</option>
    @foreach ($kesehatans as $kesehatan)
    <option value="{{ $kesehatan->id }}.{{$i }}">{{ $kesehatan-
  >status_kesehatan }}</option>
    @endforeach
    </x-select>
  </div>

```

Gambar B.4 Script Halaman Pengisian Data Diri



```

<div class="card-body">
  <ul class="list-group list-group-bordered">
    <li class="list-group-item d-flex justify-content-between align-items-center">
      Jadwal Misa
      <span>{{ $jadwal }}</span>
    </li>
    <li class="list-group-item d-flex justify-content-between align-items-center">
      Jumlah Orang
      <span>{{ $jumlah_anggota }}</span>
    </li>
    @foreach ($data_umat as $key => $item)
    <li class="list-group-item d-flex justify-content-between align-items-center">
      Nama Umat {{ $key+1 }}
      <span>{{ $item->nama_lengkap }}</span>
    </li>
    @endforeach
  </ul>

```

Gambar B.5 Script Halaman Konfirmasi




```

<div class="card-body">
  <table class="table table-bordered">
    <thead>
      <tr>
        <td>Nama</td>
        <td>Kode Qr</td>
      </tr>
    </thead>
    <tbody>
      @foreach ($pendaftarans as $pendaftaran)
        <tr>
          <td>{{ $pendaftaran->user->name }}</td>
          <td class="p-2">{!! QrCode::size(70)->generate($pendaftaran-
          >id); !!}</td>
        </tr>
      @endforeach
    </tbody>
  </table>
</div>

```

Gambar B.6 Script Halaman Akhir Pendaftaran

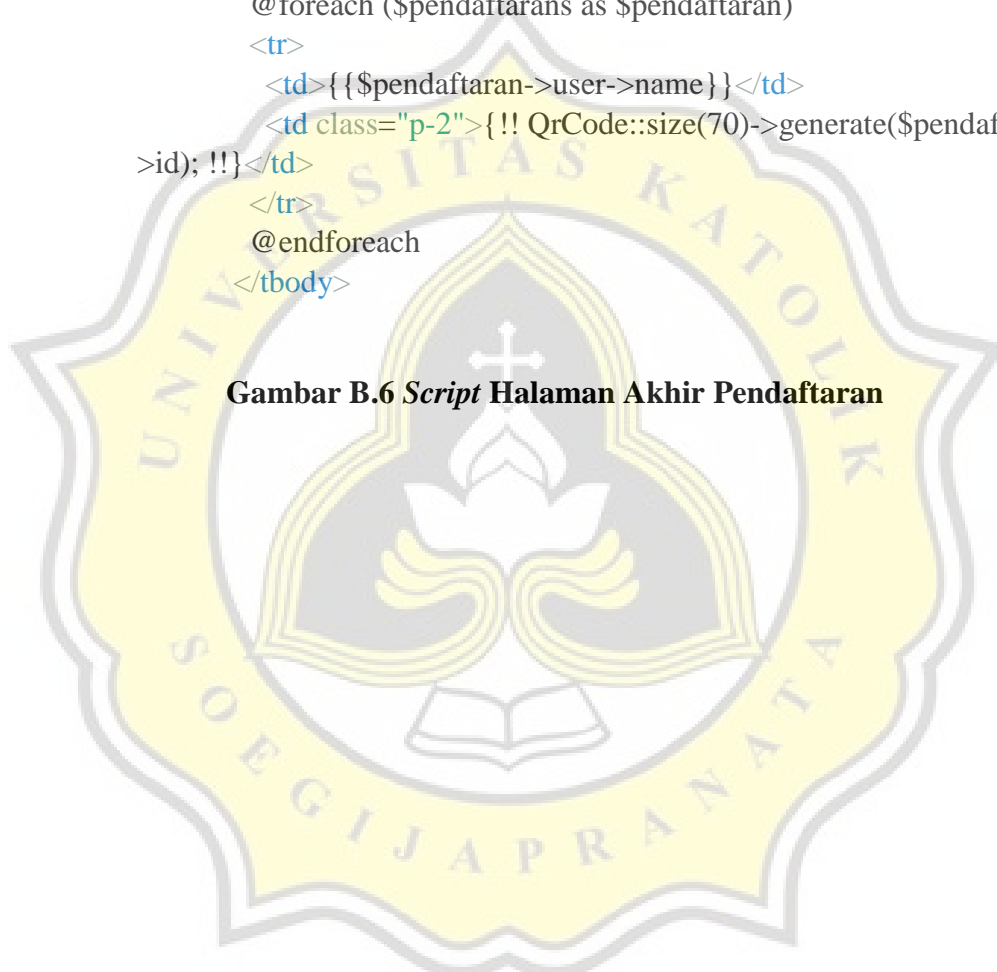


```

<div class="card-body">
  <x-
select name="jadwal_id" change="true" label="Pilih Jadwal">
  <option value="">Pilih Jadwal</option>
  @foreach ($jadwals as $jadwal)
<option value="{{ $jadwal->id }}">{{ $jadwal->tanggal-
>isoFormat('dddd, D MMMM Y')}} -
  {{ $jadwal->waktu }}</option>
  @endforeach
</x-select>
<table class="table table-bordered">
  <tr>
    <td>Nama</td>
    <td>Lingkungan</td>
    {{-- <td>Barcode</td> --}}
  </tr>
  @foreach ($pendaftarans as $pendaftaran)
  <tr>
    <td>{{ $pendaftaran->user->name }}</td>
    <td class="p-2">{{ $pendaftaran->user-
>dataUmat->lingkungan }}</td>
    {{-- <td class="m-2">{!!QrCode::size(200)-
>generate($pendaftaran->id)!!}
    </td> --}}
  </tr>
  @endforeach
</table>
</div>

```

Gambar B.7 Script Halaman Cek Pendaftaran

```

    @if ($pendaftaran->user->id == auth()-
>user()->id)
        @if ($pendaftaran->status == 2)
            <button class="btn btn-danger btn-
sm">Dibatalkan</button>
        @else
            <a href="{{ route('cetak_barcode', ['jadwal_id'
=> $pendaftaran->jadwal->id, 'limit' => 1]) }}"
            target="_blank" class="btn btn-success btn-
sm">Cetak</a>
            <button class="btn btn-primary btn-sm"
            wire:click="getId('{{ $pendaftaran-
>id }}')">Batal</button>
        @endif
        @else
            <button class="btn btn-primary btn-
sm" disabled>Batal</button>
        @endif
    </td>

```

Gambar B.8 Script Halaman Riwayat Pendaftaran

```

let html5QrcodeScanner = new Html5QrcodeScanner(
  "reader", { fps: 50, qrbox: 250 }, /* verbose= */ false);
html5QrcodeScanner.render(onScanSuccess, onScanFailure);

window.livewire.on('showModal', (data) => {
  $('#form-modal').modal('show')
});

window.livewire.on('closeModal', (data) => {
  $('#confirm-modal').modal('hide')
  $('#form-modal').modal('hide')
});
})
</script>
@endpush
<div class="col-md-6 mx-auto" wire:ignore>
  <div id="reader" width="600px"></div>
</div>
@endif
</div>

@push('scripts')
<script
src="https://blog.minhazav.dev/assets/research/html5qrcode/html5-
qrcode.min.js"></script>
<script>
document.addEventListener('livewire:load', function(e) {
  var status = true
  function onScanSuccess(decodedText, decodedResult) {
    // handle the scanned code as you like, for example:
    status && @this.call(`cekUmat`, decodedText)
    status = false
  }

  function onScanFailure(error) {
    status = true
  }
}


```

```
let html5QrcodeScanner = new Html5QrcodeScanner(
  "reader", { fps: 50, qrbox: 250 }, /* verbose= */ false);
html5QrcodeScanner.render(onScanSuccess, onScanFailure);

window.livewire.on('showModal', (data) => {
  $('#form-modal').modal('show')
});

window.livewire.on('closeModal', (data) => {
  $('#confirm-modal').modal('hide')
  $('#form-modal').modal('hide')
});
})
</script>
@endpush
```

Gambar B.9 Script Halaman Scan QR Code

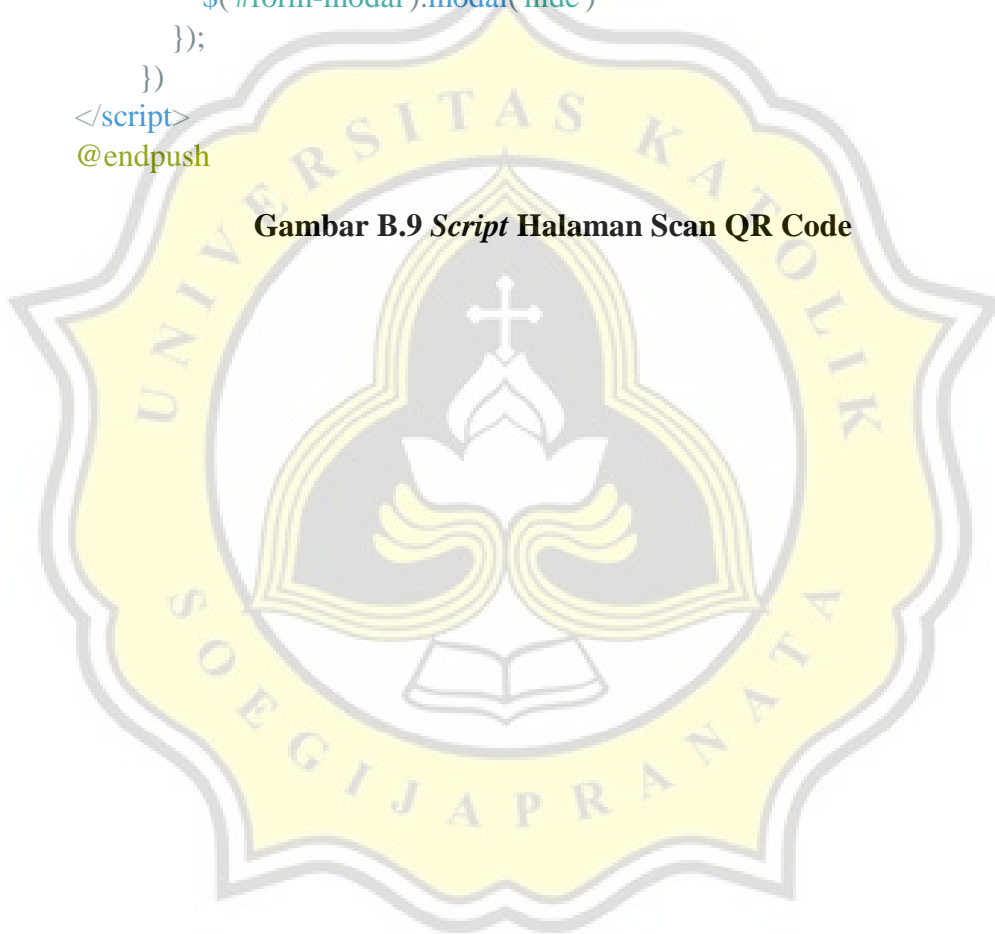

```

<div class="col-md-4">
  <div class="card card-stats card-round">
    <div class="card-body ">
      <div class="row align-items-center">
        <div class="col-icon">
          <div class="icon-big text-center icon-primary bubble-
shadow-small">
            <i class="fas fa-wallet"></i>
          </div>
        </div>
        <div class="col col-stats ml-3 ml-sm-0">
          <div class="numbers">
            <p class="card-category">Jumlah User</p>
            <h4 class="card-title">{{ $user }}</h4>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
<div class="col-md-6">
  <div class="card">
    <div class="card-header">
      <div class="card-title">Perbandingan Kehadiran</div>
    </div>
    <div class="card-body">
      <div class="chart-container">
        {!! $chart1->renderHtml() !!}
      </div>
    </div>
  </div>
</div>
</div>

```

Gambar B.10 Script Halaman Utama Admin

```

public function store()
{
    $this->_validate();

    $data = [
        'tanggal' => $this->tanggal,
        'waktu' => $this->>waktu,
        'kuota_tersedia' => $this->kuota_tersedia
    ];

    ModelsJadwal::create($data);

    $this->_reset();
    return $this->emit('showAlert', ['msg' => 'Data Berhasil
Disimpan']);
}
public function delete()
{
    ModelsJadwal::find($this->jadwal_id)->delete();

    $this->_reset();
    return $this->emit('showAlert', ['msg' => 'Data Berhasil
Dihapus']);
}

```

Gambar B.11 *Script Halaman Jadwal*

```

<div class="modal-content">
  <div class="modal-header">
    <h5 class="modal-title text-capitalize" id="my-modal-
title">
      {{ $update_mode ? 'Update' : 'Tambah' }} data
umat</h5>
    </div>
    <div class="modal-body">
      <x-text-field type="text" name="nama_lengkap"
label="Nama lengkap" />
      <x-text-field type="date" name="tanggal_lahir"
label="Tanggal lahir" />
      <x-textarea type="textarea" name="alamat"
label="Alamat" />
      <x-text-field type="text" name="lingkungan"
label="lingkungan" />
      <x-text-field type="text" name="wilayah"
label="Wilayah" />
      <x-text-field type="number" name="telepon"
label="Telepon" />
    </div>
    <div class="modal-footer">
      <button type="button" wire:click={{ $update_mode ?
'update' : 'store' }}
class="btn btn-primary btn-sm"><i class="fa fa-check
pr-2"></i>Simpan</button>
      <button class="btn btn-danger btn-sm"
wire:click='_reset'><i
class="fa fa-times pr-2"></i>Batal</a>
    </div>
  </div>
</div>

```

Gambar B.12 Script Halaman Data Umat

```

<div class="modal-content">
  <div class="modal-header">
    <h5 class="modal-title text-capitalize" id="my-modal-
title">
      {{ $update_mode ? 'Update' : 'Tambah' }} status
kesehatan</h5>
    </div>
    <div class="modal-body">
      <x-text-field type="text" name="status_kesehatan"
label="Status kesehatan" />
      <x-select name="status" label="Status Daftar">
        <option value="">Pilih Status Daftar</option>
        <option value="1">Boleh Daftar</option>
        <option value="0">Tidak Boleh Daftar</option>
      </x-select>
    </div>
    <div class="modal-footer">
      <button type="button" wire:click={{ $update_mode ?
'update' : 'store' }}
      class="btn btn-primary btn-sm"><i class="fa fa-check
pr-2"></i>Simpan</button>
      <button class="btn btn-danger btn-sm"
wire:click='_reset'><i
      class="fa fa-times pr-2"></i>Batal</a>
    </div>
  </div>
</div>

```

Gambar B.13 Script Halaman Status Kesehatan


```

<div class="card-body">
  <h4 class="card-title text-capitalize">
    <a href="{{route('dashboard')}}">
      <span><i class="fas fa-arrow-left mr-3 text-
capitalize"></i>Riwayat Kehadiran</span>
    </a>
  </h4>
</div>
</div>
</div>

<div class="col-md-12">
  <div class="card">
    <div class="card-body">
      <x-select name="jadwal_id" component="filterData"
change="true" label="Pilih Jadwal">
        <option value="">Pilih Jadwal</option>
        @foreach ($jadwals as $jadwal)
          <option value="{{ $jadwal->id }}">{{ $jadwal->tanggal-
>isoFormat('dddd, D MMMM Y')}} -
            {{ $jadwal->waktu }}</option>
        @endforeach
      </x-select>
    </div>
  </div>
</div>

```

Gambar B.14 Script Halaman Riwayat Kehadiran

```

<div class="card-body">
  <h4 class="card-title text-capitalize">
    <a href="{{route('dashboard')}}">
      <span><i class="fas fa-arrow-left mr-3 text-
capitalize"></i>Riwayat Pendaftaran</span>
    </a>
  </h4>
</div>
</div>
</div>
</div>

<div class="col-md-12">
  <div class="card">
    <div class="card-body">
      <div class="row">
        <div class="col-md-4">
          <x-text-field type="date" name="tanggal_mulai"
label="Tanggal Awal" />
        </div>
        <div class="col-md-4">
          <x-text-field type="date" name="tanggal_selesai"
min="{{ $tanggal_mulai }}"
label="Tanggal Akhir" />
        </div>
      </div>
    </div>
  </div>
</div>

```

Gambar B.15 Script Halaman Riwayat Pendaftaran

```

<div class="card-body">
  <h4 class="card-title text-capitalize">
    <a href="{{route('dashboard')}}">
      <span><i class="fas fa-arrow-left mr-3 text-
capitalize"><i>Riwayat Pembatalan</i></span>
    </a>
  </h4>
</div>
</div>
</div>
</div>

<div class="col-md-12">
  <div class="card">
    <div class="card-body">
      <div class="row">
        <div class="col-md-4">
          <x-text-field type="date" name="tanggal_mulai"
label="Tanggal Awal" />
        </div>
        <div class="col-md-4">
          <x-text-field type="date" name="tanggal_selesai"
min="{{ ${tanggal_mulai} }}"
label="Tanggal Akhir" />
        </div>
      </div>
      <div class="form-group mt-2">
        <button class="btn btn-primary btn-sm"
wire:click="setFilter">Filter</button>
      </div>
    </div>
  </div>
</div>

```

Gambar B.16 Script Halaman Riwayat Pembatalan

```

<div class="card-body">
  <h4 class="card-title text-capitalize">
    <a href="{{route('dashboard')}}">
      <span><i class="fas fa-arrow-left mr-3 text-
capitalize"></i>Riwayat Absen</span>
    </a>
  </h4>
</div>
</div>
</div>

<div class="col-md-12">
  <div class="card">
    <div class="card-body">
      <x-select name="jadwal_id" component="filterData"
change="true" label="Pilih Jadwal">
        <option value="">Pilih Jadwal</option>
        @foreach ($jadwals as $jadwal)
          <option value="{{ $jadwal->id }}">{{ $jadwal->tanggal-
>isoFormat('dddd, D MMMM Y')}} -
            {{ $jadwal->>waktu }}</option>
        @endforeach
      </x-select>
    </div>
  </div>
</div>

```

Gambar B.17 Script Halaman Riwayat Absen

PAPER NAME

17.N1.0010.docx

WORD COUNT

8131 Words

CHARACTER COUNT

51653 Characters

PAGE COUNT

28 Pages

FILE SIZE

44.7KB

SUBMISSION DATE

Jul 15, 2022 8:30 AM GMT+7

REPORT DATE

Jul 15, 2022 8:31 AM GMT+7**● 7% Overall Similarity**

The combined total of all matches, including overlapping sources, for each database.

- 6% Internet database
- Crossref database
- 4% Submitted Works database
- 1% Publications database
- Crossref Posted Content database

● Excluded from Similarity Report

- Bibliographic material
- Cited material
- Manually excluded text blocks
- Quoted material
- Small Matches (Less than 10 words)